

Ergonomically designed units to provide protection against accidental operation of machines. Completely sealed units prevent tampering and comply with latest European safety standards.



- Ergonomic design
- Robust polymer or metal enclosure
- Meets requirements for protection against accidental operation and tampering
- Metal enclosure features a wrist-rest bar which helps prevent illness due to repetitive actions
- Conforms to EN574 and EN954-1 requirements

**Operating information**

Working pressure	3 to 8 bar
Working temperature	-5 °C to +60 °C
For more information see <a href="http://www.parker.com/euro_pneumatic">www.parker.com/euro_pneumatic</a>	

**Control module only**

Symbol	Connections	Order code
	Ø4 mm Push-in	<b>PXP-A11</b>

**Complete units**

Polymer enclosure, with two Ø40 mm push button with protective guards and control module


Symbol	Connections	Number of control modules	Order code
	Ø4 mm Push-in	1	<b>PXP-C111</b>
	Ø4 mm Push-in	2	<b>PXP-D121</b>

Metal enclosure, with two Ø60 push buttons, wrist restbar, built in protective guard and control module


Symbol	Connections	Number of control modules	Order code
	Push-in Ø6 mm for supply Ø4 mm for output	1	<b>PXP-S111</b>
	Push-in Ø6 mm for supply Ø4 mm for output	2	<b>PXP-S121</b>

**Dimensions**


**PXP-A11**

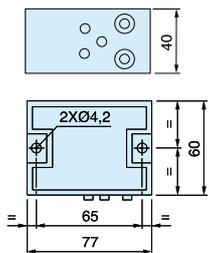

**PXP-C111 and PXP-D121**

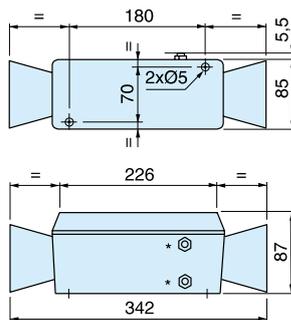

**PXP-S111 and PXP-S121**

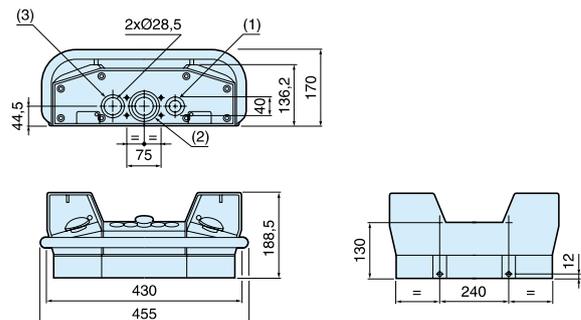

\* Ø4 mm push-in connections  
\*\* Ø6 mm push-in connections