


- All plastic ultra light weight versions
- Sintered metal
- All metal versions for heavy duty applications
- Versions with push-in connections
- High noise level reduction
- Low back pressure generation



Operating and additional information



| | | | | |
|---------|-------------------------------------|------------------|--------------|--|
| Plastic | Working temperature: -10°C to +80°C | | | |
| | Efficiency 92% | | | |
| Metal | Working temperature: -10°C to +74°C | Working pressure | up to 17 bar | |

Sintered Bronze Series (female)




| Port mm | A | Ø B | A/F C | Weight g | Order code |
|---------|----|-----|-------|----------|-------------------|
| G1/8 | 15 | 8 | 13 | 0,060 | 9721900404 |

Heavy Duty Series



| Port Female | A | Ø B | Weight g | Order code |
|-------------|-----|-----|----------|-----------------|
| G3/8 | 83 | 37 | 0,124 | P6M-MA13 |
| G1/2 | 105 | 51 | 0,362 | P6M-MA14 |
| G3/4 | 143 | 73 | 0,670 | P6M-MA16 |
| G1 | 143 | 73 | 0,666 | P6M-MA18 |

Self Cleaning, 48 Series

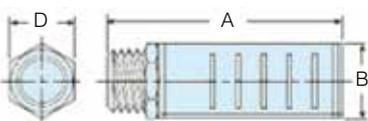

| Port thread | A | Ø B | A/F E | Order code |
|-------------|-----|------|---------------|-----------------|
| R1/8 | 47 | 21 | 16 (5/8") | ESB12MC |
| R1/4 | 47 | 21 | 16 (5/8") | ESB25MC |
| R3/8 | 84 | 32 | 25.4 (1") | ESB37MC |
| R1/2 | 84 | 32 | 25.4 (1") | ESB50MC |
| R3/4 | 116 | 52 | 41.2 (1-5/8") | ESB75MC |
| R1 | 116 | 52 | 41.2 (1-5/8") | ESB100MC |
| R1-1/4 | 145 | 73.5 | - | ESB125MC |
| R1-1/2 | 145 | 73.5 | - | ESB150MC |